

Flexible Cable Jointing and Repair System

Data Sheet

Scotchcast flexible power cable jointing and repair kits are a flexible cold pour resin system for the permanent jointing and repair of single or multi-core flexible power cables.

The flexible Scotchcast resin bonds securely to the cable sheath, providing a permanent joint or repair with tight seal - a seal that won't tear or work loose after installation.

They can be used to joint or repair frequently coiled power cables, and are tough enough to use in weather exposed, direct burial or submerged locations.

- ❖ Simple installation – no workshop needed.
- ❖ Non-vulcanising – no costly equipment needed.
- ❖ Drastic reduction in repair time – compared to vulcanising.
- ❖ No heat required – safer system, no permit for hot work required.
- ❖ High performance – repaired/jointed section can be reeled without sagging.
- ❖ Permanent – both electrically and mechanically.
- ❖ No end lifting – bonds to all modern cable sheath materials such as neoprene, polychloroprene and nitrile/PVC even PVC, EPR and hypalon.
- ❖ Abrasion resistant – equivalent to vulcanising.
- ❖ Weather resistant – over a wide temperature range.
- ❖ Flame retardant – resin system.

Three sizes of kit enables repairs to be made on cable ranging from 40mm O/D to 150mm O/D.


Resin supplied separately from the kit, only 3M 2130 Flexible Resin is suitable for use with these kits.

Flexible Jointing and Repair Kit

Kit No.	Cable Size (Dia)		Max Length of Joint/Repair (mm)	Mould Length (mm)	Quantity of Resin needed for Joint (grammes)
	Min (mm)	Max (mm)			
M20	40	63	360	510	1200 (2xC size packs)
M30	47	100	520	740	2220 (3 x C and 2 x B size packs)
M40	27	150	813	1118	3600 (6 x C size packs)



Excellent flexibility in completed joint.

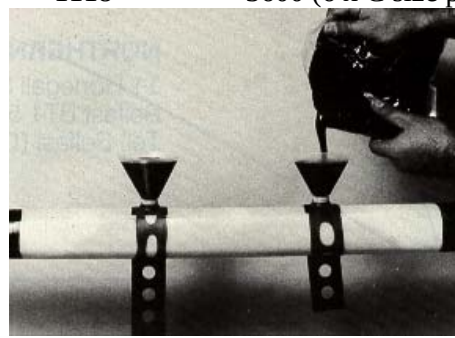

Easy to use system.

Important Notice

Technical information provided by 3M is based on experience and/or tests believed to be reliable, but their accuracy is not guaranteed and the results may not be relevant to every user's application. For this reason 3M does not accept responsibility or liability, direct or consequential, arising from reliance upon any information provided and the user should determine the suitability of the products for their intended use. Nothing in this statement will be deemed to exclude or restrict 3M's liability for death or personal injury arising from its negligence. All questions of liability relating to 3M products are governed by the seller's terms of sale subject where applicable to the prevailing law. If any goods supplied or processed by or on behalf of 3M prove on inspection to be defective in material or workmanship, 3M will (at its option) replace the same or refund to the Buyer the price paid for the goods or services. Except as set out above, all warranties and conditions, whether express or implied, statutory or otherwise are excluded to the fullest extent permissible at law.

3M and Scotchcast are trademarks of the 3M Company. Printed in the UK. © 3M United Kingdom PLC, 2003.

Electrical Markets Division
3M United Kingdom PLC
Sales Office
PO Box 393
Bedford MK41 0YE
Telephone: 0870 609 4639
Fax: 01234 229 433

3M Ireland Ltd
Sales Office
The Iveagh Building, The Park,
Carrickmines, Dublin 18, Ireland
Telephone: (01) 800 812 732
Fax: 353 1 280 3509

3M United Kingdom PLC
Head Office
3M Centre, Cain Road
Bracknell, Berkshire RG12 8HT
Telephone: 01344 858 000
Fax: 01344 858 758